


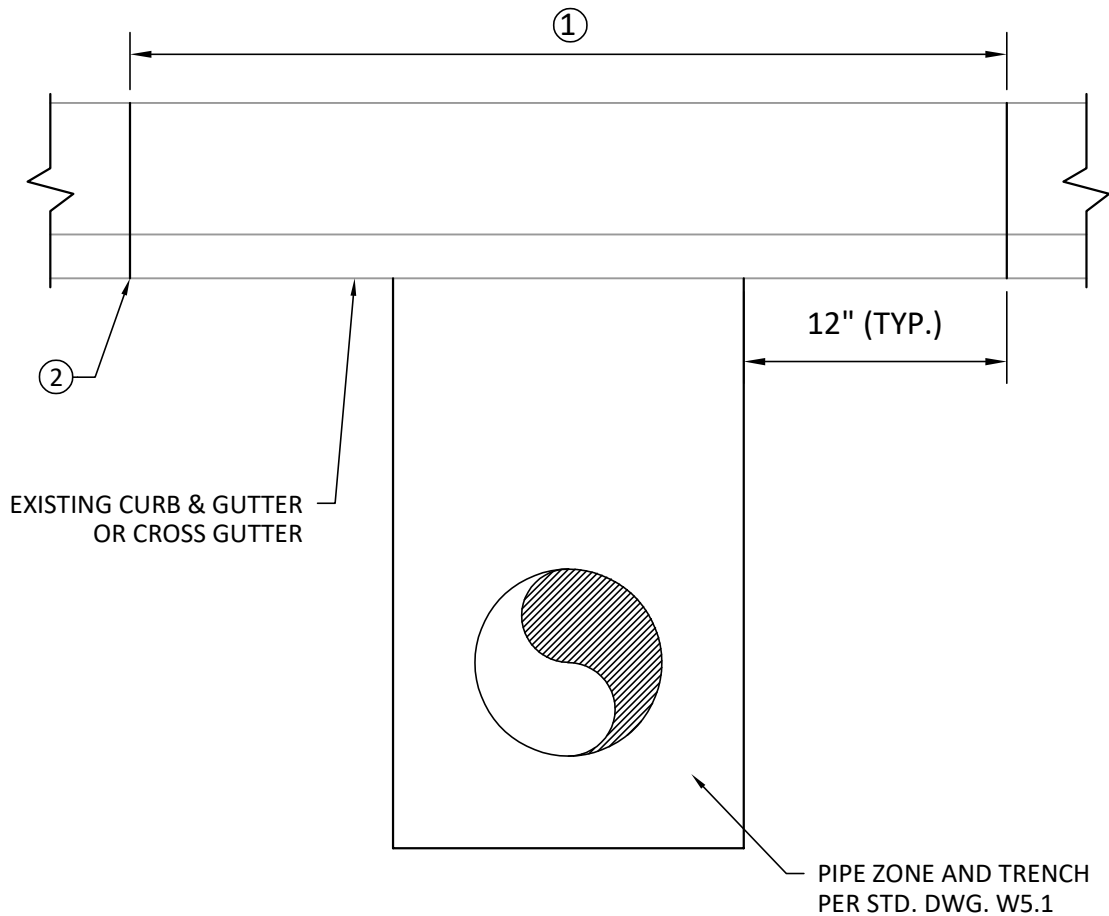

ITEM	DESCRIPTION
①	REMOVE EXISTING CURB & GUTTER TO NEATLY SAWED EDGES. AFTER PIPELINE HAS BEEN INSTALLED AND PROPERLY BACKFILLED, NEW CURB & GUTTER SHALL BE INSTALLED PER CITY OF SAN BERNARDINO PUBLIC WORKS DEPARTMENT STANDARD PLAN 200.
②	IF THE SAW CUT WOULD FALL WITHIN 30 INCHES OF A CONSTRUCTION JOINT, EXPANSION JOINT, OR EDGE, THE CURB & GUTTER SHALL BE REMOVED TO THE JOINT OR EDGE

REVISION DATE: 9/28/2011

		SAN BERNARDINO MUNICIPAL WATER DEPARTMENT		DRAWING NUMBER
		CURB AND GUTTER CROSSING CONFIG. 12" AND LARGER PIPELINES		
F.D.L.	SEPT 11			SBMWD
G.B.	MAY 11			W6.39A
REVISION	DATE			
SCALE: NONE		APPROVED 	DATE 07/04/2019	
WARREN HUANG, P.E. RCE 49208				